


post press

automatic squeegee sharpener

120 | 150 | 160 | 180 | 200 | 250 | 280 | 300 | 320 | 360

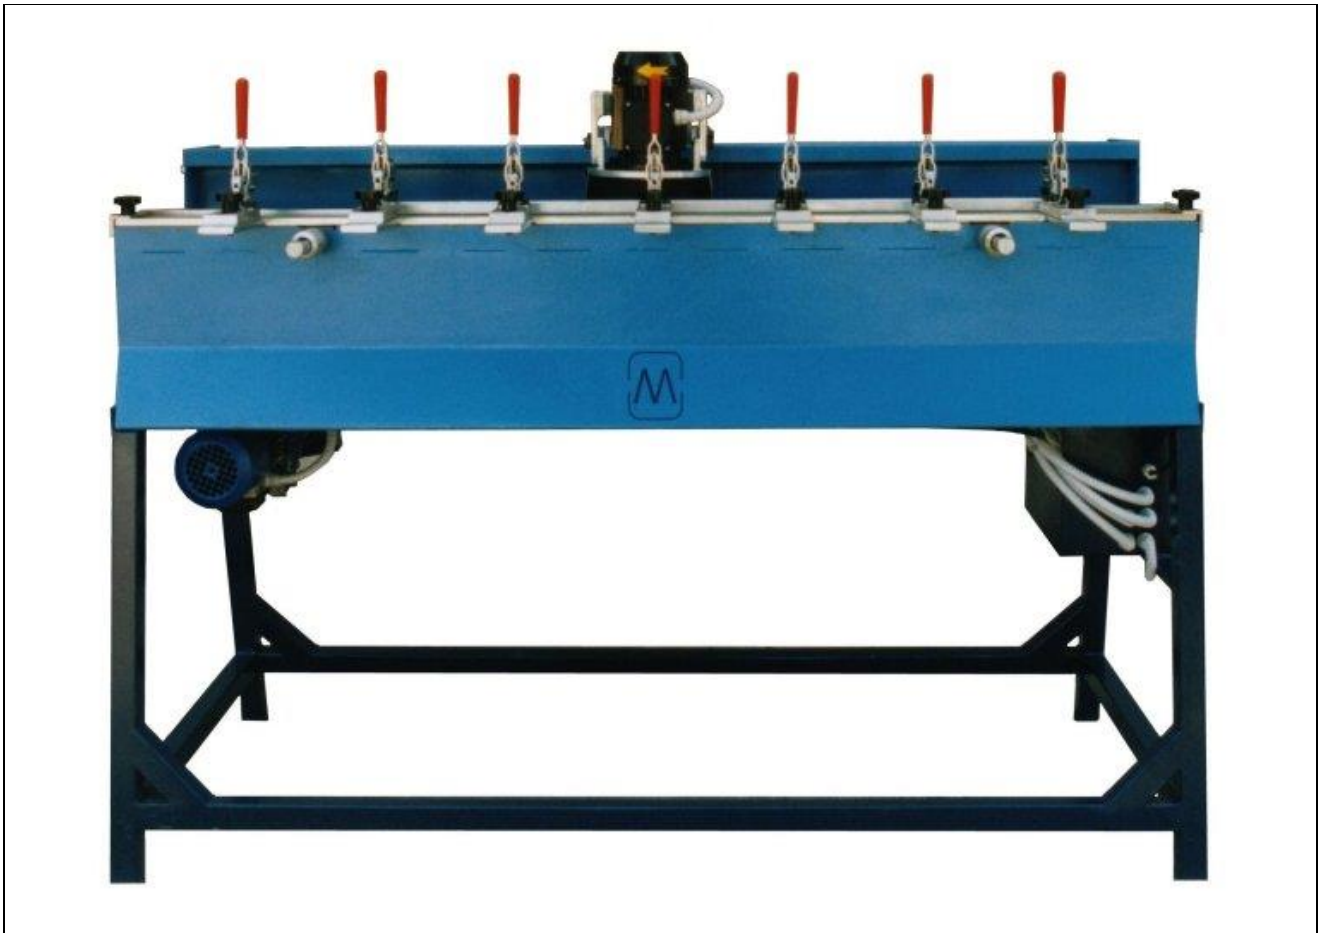

### **Description**

The squeegee sharpener has been designed and built continuing the rudiments of the mechanic grinder.

The squeegee sharpener is an indispensable equipment, both for the saving coming from the possibility to reuse the rubber for many times, and because quality printings depend on the perfection of the rubber's edge.

### **Working**

As soon as the squeegee has been fastened by the mechanical clamps, the rotating grinder moves first towards left to **rectify** the rubber, then towards right to **polish** it.

### Technical data

Max grinding length <sup>1</sup> :	120 cm   150 cm   160 cm   180 cm   200 cm 250 cm   280 cm   300 cm   320 cm   360 cm
Rectifying thickness:	0.1÷2 mm for stroke
Electrical supply <sup>2</sup> :	380÷400 V 3-phase + neutral, 50÷60 Hz
Installed power:	0.5 kW


[1] Any other length available on request.

[2] Any other three-phase electrical supply available on request.

In order to improve the quality of the product, the Mismatic Company is allowed to effect modifications in the manufacturing without any obligation to notify the same to the Customer.

### Standard features

- ❖ **Squeegee's fixing:** by mechanical clamps
- ❖ **Rectifying thickness:** adjustable
- ❖ **Grinder's slope:** adjustable 0÷30°
- ❖ **Grinder's rotation speed:** fixed
- ❖ **Grinder's translation speed:** adjustable
- ❖ **Grinder's length:** adjustable by micro-switches

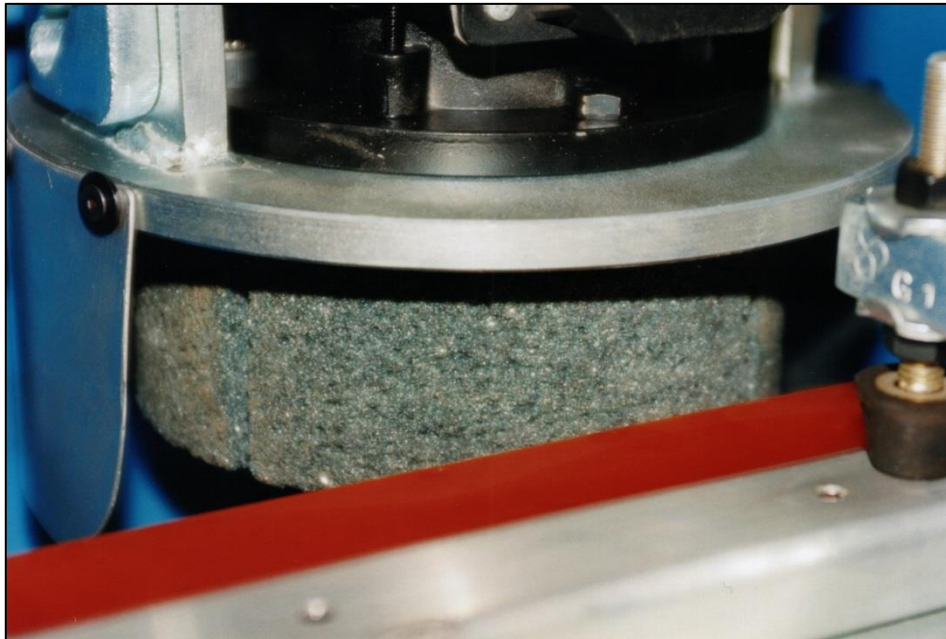

*detail of the rotating grinder*